
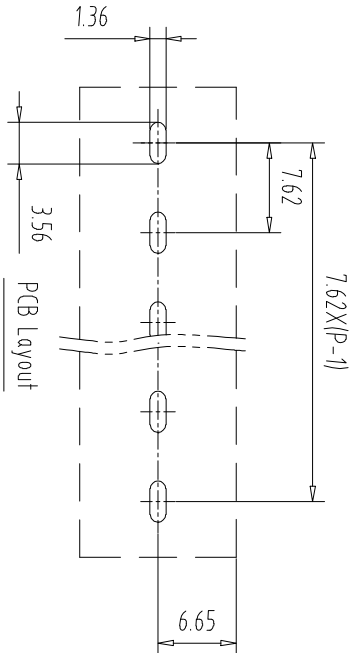
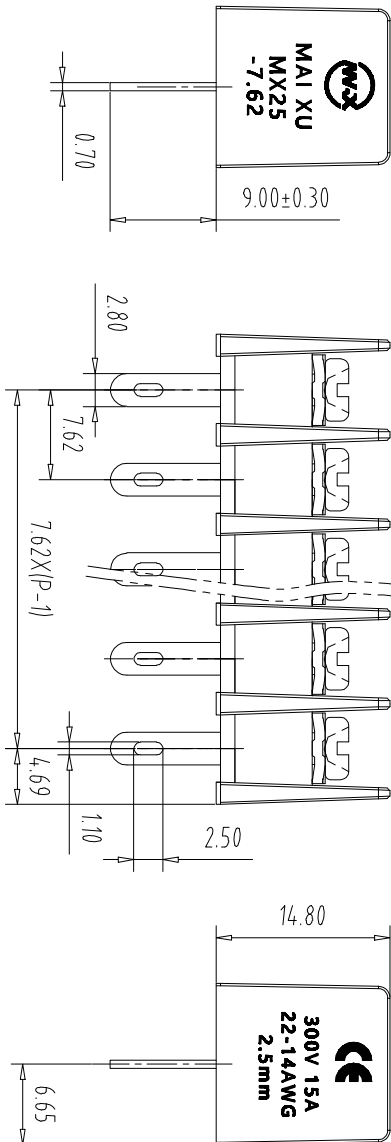


注：本板为禁止转输、复制、编辑或存档，以及用其内容进行交流

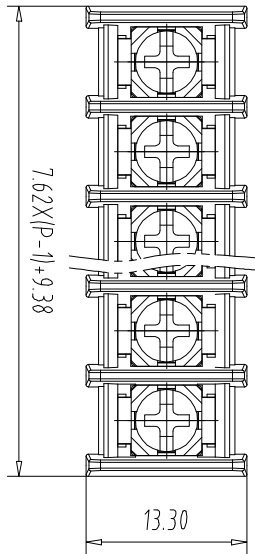

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

2. Torque value: M3, 4, 4.3Lb.in

3. Wire range: 22~14AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

2. Torque value: M3, 0.5Nm
3. wire range: 15mm²

NOTES2:

- Housing: PA66(UL 94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Screw: Steel(M3, Ni Plated)

NOTES3:

- Pitch: 7.62mm Poles: 02-24P
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

MX25H - 7.62 - XXP - XXXX - XX - X - X

产品型号

间距

板数

颜色

01: 常規顏色

0.1: 其他定制

A-Z 其他定制

Fe 铁

Cu 铜

1.5 十字螺丝

2. PS 平头十字螺丝

灰色:GY 棕色:OE 02-99:

蓝色:BU 红色:RD 定制颜色

黑色:BK 透明色:TT

绿色:GN 黄色:YW

透明色:TT 白色:WE

Pitch Range	In mm	Nominal Dimension	Range
-------------	-------	-------------------	-------

mm	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150	Over 150
TO	6	10	24	30	60	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	MX25H-7.62-XXP		



CIXI MAIXU ELECTRONICS CO.,LTD

慈溪市迈旭电子有限公司

DWGNO.

1