
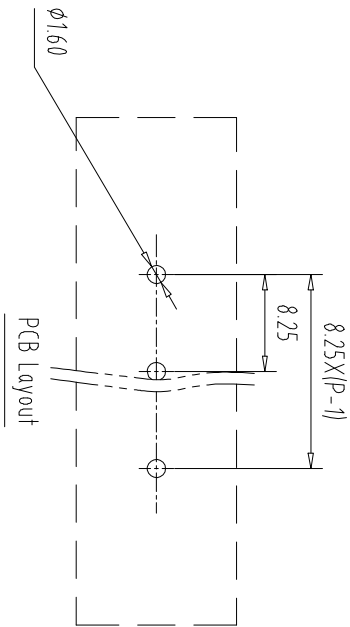
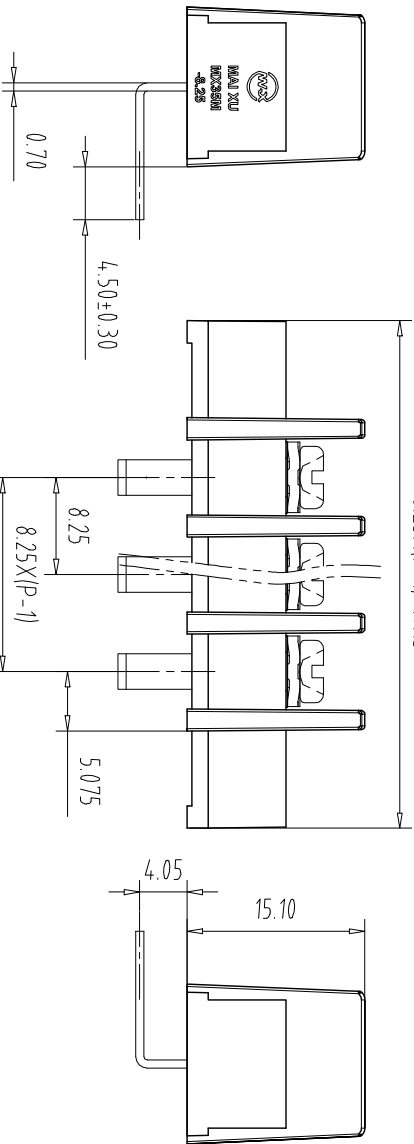


注：本板为禁止转输、复制、编辑文件，以及用其内容进行交流

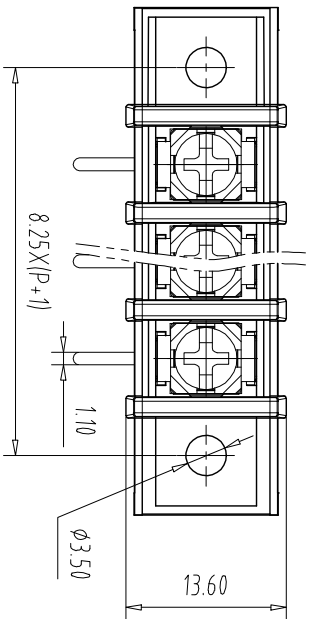

Pitch Range		Nominal Dimension		Range			
mm	Over	In	mm	Over	In	mm	Over
6	10	10	30	60	100	150	0.1/10
TO	TO	TO	TO	TO	TO	TO	0.1/10
6	10	24	30	60	100	150	0.1/10
TO	TO	TO	TO	TO	TO	TO	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	20A	/	/
Rated Voltage	300V	/	/

2. Torque value: M3, 4, 4.3Lb.in
3. Wire range: 22~12AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	17.5A	/

2. Torque value: M3, 0.5Nm
3. wire range: 2.5mm²

NOTES2:

- Housing: PA66(UL94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Screw: Steel(M3,Ni Plated)

NOTES3:

- Pitch: 8.25mm Poles: 02 -24P
- Stripping length: 8mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

MX35RM - 8.25 - XXP - XXXX - XX - X - X

产品型号

间距

颜色:

极数

01带颜色

02-99:

定制颜色

Fe 铁

Cu 铜

0-Y一字螺丝

1.5十字螺丝

2-PS平头十字螺丝

A-Z其他定制

灰色:GY 棕色:OE

蓝色:BU 红色:RD

黑色:BK 透明色:TT

绿色:GN 黄色:YW

透明色:TT 白色:WE

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	MX35RM-8.25-XXP		
CIXI MAIXU ELECTRONICS CO.,LTD					
东莞市迈旭电子有限公司					
DWGNO.					