

注：未经批准不得传输、复制、编辑或文档，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77Lbin

3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	I
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm

3. wire range: 0.2~1.5mm²

NOTES2:





- Housing: PA66 (UL94V-0)
- Cover: PA66 (UL94V-0)
- Clamp: Copper alloy (Ni Plated)
- Cage: Brass (Ni Plated)
- Screw: Steel (M2,Zn Plated)

NOTES3:

- Pitch: 3.81mm Poles: 02-24P
- Stripping length: 6-7mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

MX15EDGKB - 381 - XXP - XXXX - XX - X - X

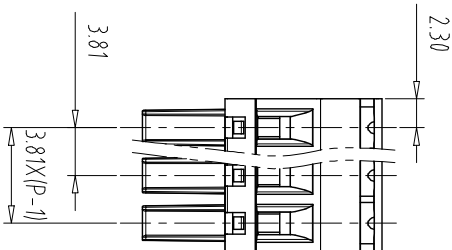

Pitch Range In mm		Nominal Dimension Range In mm		Pitch Range In mm		Nominal Dimension Range In mm		Pitch Range In mm		Nominal Dimension Range In mm	
Over 6	TO 10	Over 10	TO 24	Over 30	TO 60	Over 60	TO 100	Over 100	TO 150	Over 150	TO 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 100	TO 150	TO 150	TO 150	TO 150	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±1.30	±1.30	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.06.20	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	MX15EDGKB-3.81-XXP		
CIXI MAIXU ELECTRONICS CO.,LTD.					DWGNO.
慈溪市迈旭电子有限公司					