
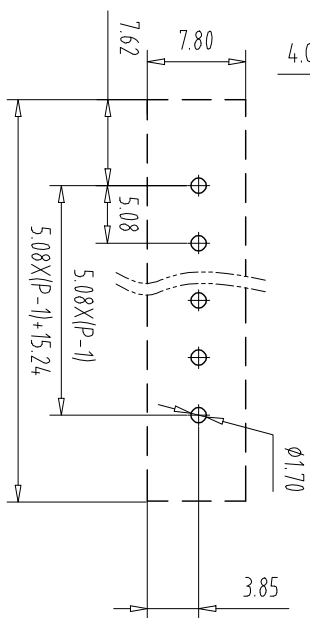
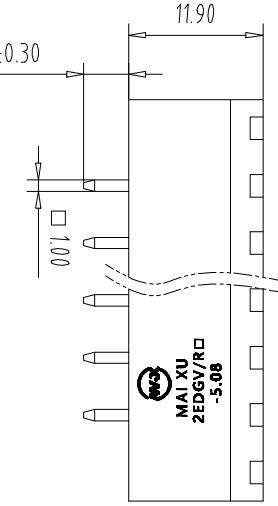


注：本图为基础传输、复制、编辑文档，以及附具内容进行交流

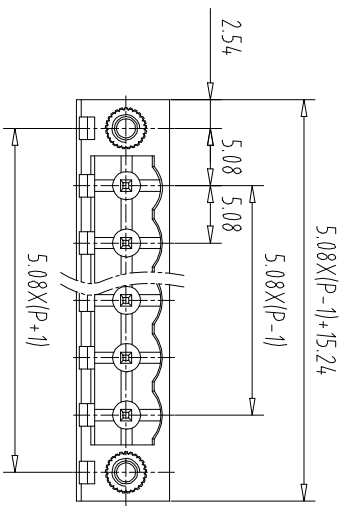

PCB Layout

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range		Pitch Range In mm	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	Over 6	Over 10
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150	TO 6	TO 10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------


NOTES1:
UL Standard
1.Rating voltage/current: 300V/15A
2.withstanding voltage: AC2000V/1Min
IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	15A

NOTES2:
1.Housing: PA66 (UL94V-0)
2.Solder Pin: Brass (Sn Plated)
3.Nut: Brass (M2.5)

NOTES3:
1.Pitch: 5.08mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

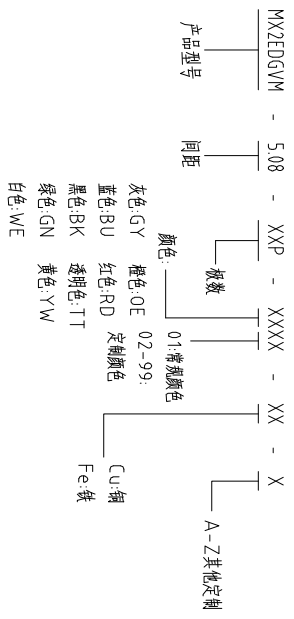

ITEM	NAME OF PART	NO. OF PART	Q.TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK		DATE		SCALE	1:1
APP.		DATE		NAME	MX2EDGVM-5.08-XXP
CIXI MAIXU ELECTRONICS CO.,LTD.					
MAIXU 慈溪市迈旭电子有限公司					
DWGNO.					