
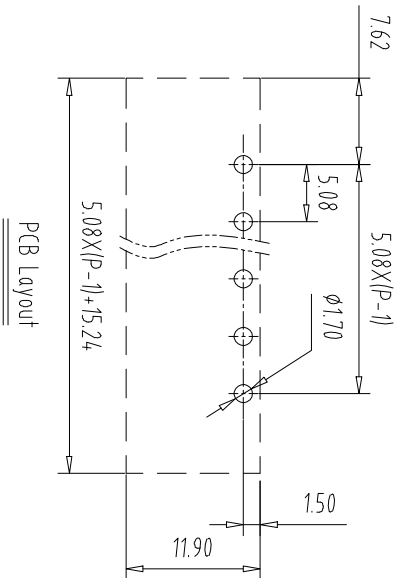

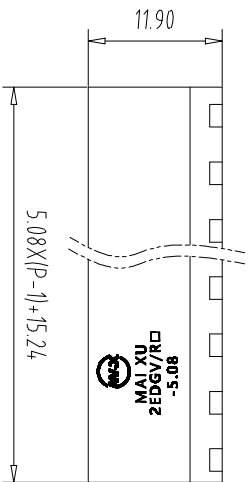


FILE: 本档为禁止传输、复制、编辑或存档，以及用其内容进行交流

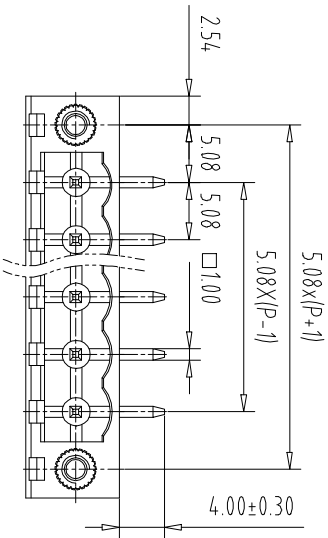

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:
UL Standard
1.Rating voltage/current: 300V/15A
2.withstanding voltage: AC2000V/1Min
IEC Standard

1.	Pollution Degree	2
Overvoltage Category	III	
Rate Impulse Voltage(KV)	4.0KV	
Rate Voltage(V)	320V	
Rate Current(A)	15A	

NOTES2:
1.Housing: PA66 (UL94V-0)
2.Solder Pin: Brass (Sn Plated)
3.Nut: Brass (M2.5)

NOTES3:
1.Pitch: 5.08mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

MX2EDGRM - 5.08 - XXP - XXXX - XX - X

产品型号 间距 板数 颜色: 01:常规颜色 A-Z其他定制

灰色:GY 橙色:OE 蓝色:BU 红色:RD 黑色:BK 透明色:TT 绿色:GN 黄色:YW 白色:WE

Cu:铜 Fe:铁

Pitch Range In mm	Nominal Dimension Range In mm	—	—
Over 6 TO 10 TO 24 TO 30 TO 60 TO 100 TO 150	Over 30 TO 60 TO 100 TO 150	0.1/10	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	MX2EDGRM-5.08-XXP		



CIXI MAIXU ELECTRONICS CO.,LTD.



慈溪市迈旭电子有限公司

DWGNO.