
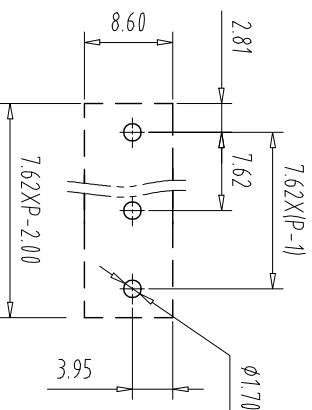
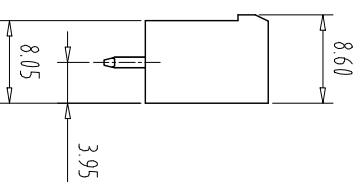



6	未经允许禁止传播、复制、编辑或入档, 以及利用其内容进行交流
注:	



Pitch Range In mm	Nominal Dimension Range In mm	—	⌒	▱
-------------------	-------------------------------	---	---	---

Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
6	30	100	150			
± 0.15	± 0.20	± 0.30	± 0.50	± 0.70	± 1.00	± 1.30
						$\geq 2^\circ$

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

	B	C	D
Use group			
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

2.withstanding voltage: AC1600V/1Min

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	15A	/

NOTES:

1.Housing: PA66 (UL94V-0)

2. Solder Pin: Brass (Sn Plated)

NOTES:

1.Pitch: 7.62mm Poles: 02-24P

$-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

MX2EDGV	-	7.62	-	XXP	-	XXXX	-	X	-	X
---------	---	------	---	-----	---	------	---	---	---	---

产品型号	板数	间距	01-营销颜色
1	2	3	4

灰色:GY	橙色:OE	定制颜色	Cu:铜
蓝色:BU	红色:RD		Fe:铁

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	CKK	DATE 23.06.20	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4 
APP.		DATE			