
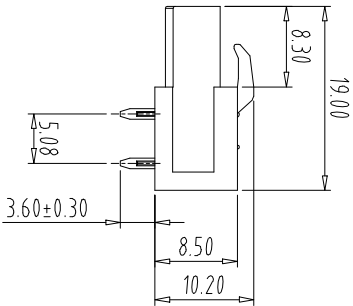



注： 未经允许禁止传输、复制、编辑或文档，以及利用其内容或进行交流



NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	320V	320V	630V
Rate Current(A)	12A	12A	12A

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Clamp: Copper alloy (Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

MX2EDGA - 508 - XXP - XXXX - XX - X

产品型号

间距

颜色:

极数

01:常开颜色

A-Z其他定制

灰色:GY 棕色:OE 02-99:

蓝色:BU 红色:RD 定制颜色

黑色:BK 透明色:TT


绿色:GN 黄色:YW

白色:WE

Cu:铜
Fe:铁

Pitch Range In mm	In mm	Nominal Dimension Range	—	—
-------------------	-------	-------------------------	---	---

TO 6	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
	±2°							
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

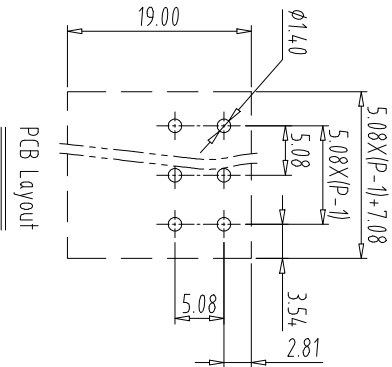

PCB Layout

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

ITEM	NAME OF PART	NO. OF PART	Q.TY	MATERIAL	NOTE		
DWG.	CHK	DATE	24.03.10	UNITS	MM	SHEET/OF	1/1
CHK		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	MX2EDGA-5.08-XXP		
 CIXI MAIXU ELECTRONICS CO.,LTD				 慈溪市迈旭电子有限公司			



CXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司

DWGNO.

3

2

1