
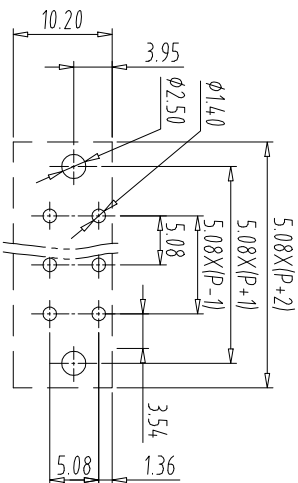
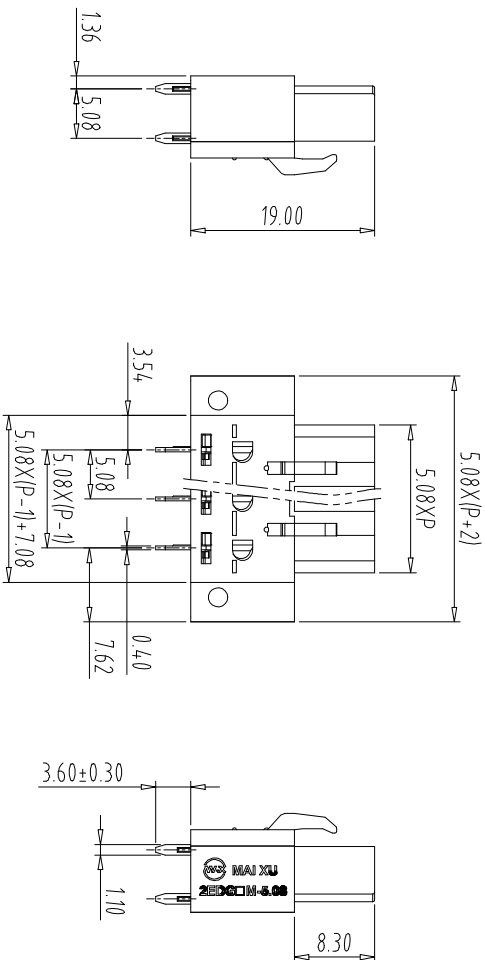


注：未经许可禁止传输、复制、编辑或文档，以及利用其内容进行交流

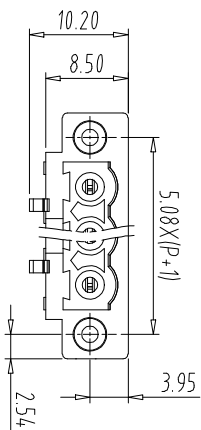

PCB Layout

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	320V	320V	630V
Rate Current(A)	12A	12A	12A

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Cover: PA66 (UL94V-0)

3.Clamp: Copper alloy (Sn Plated)

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

MX2EDGB - 5.08 - XXP - XXXX - XX - X

产品型号

间距

颜色:

极数

01:常规颜色

定制颜色

A-Z其他定制

灰色:GY 棕色:OE 02-99:

蓝色:BU 红色:RD 透明色:TT

黑色:BK 定制颜色

绿色:GN 黄色:YW

白色:WE

Pitch Range In mm	Nominal Dimension Range In mm		
-------------------	-------------------------------	--	--

Over 6 TO 6	Over 10 TO 10	Over 30 TO 24	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70		±1.00	±1.30
≤								

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	24.03.10	UNITS	MM
CHK.		DATE		SCALE	1 : 1
APP.		DATE			A4
				NAME	
				MX2EDGB-5.08-XXP	
					
CIXI MAXXU ELECTRONICS CO.,LTD.					
MAX XU 慈溪市迈旭电子有限公司					
DWGNO					



CXI MAIXU ELECTRONICS CO.,LTD.

DWGNO.

慈溪市迈旭电子有限公司