

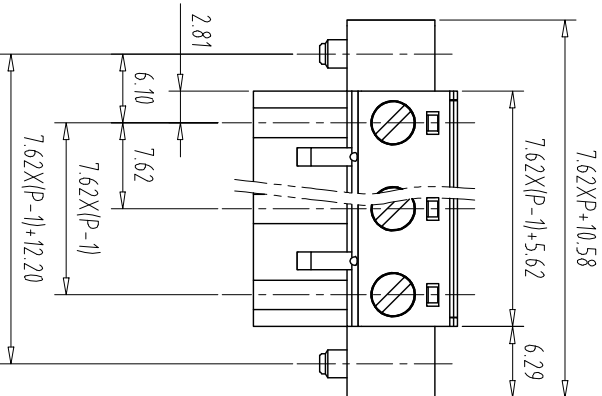



注：本型为禁止传输、复制、编辑、修改、以及利用其内容进行交流

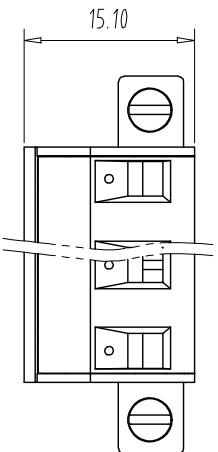

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:
UL Standard

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

1. Torque value: M2.5, 3.54Lb.in
2. Torque value: M2.5, 3.54Lb.in
3. Wire range: 28~12AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	II	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	15A	/

2. Torque value: M2.5, 0.4Nm
3. wire range: 0.2~2.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
2.Cover: PA66 (UL94V-0)
3.Cage: Brass (Ni Plated)
4.Clamp: Copper alloy (Ni Plated)
5.Screw1: Steel (M2.5,Zn Plated)
6.Screw2: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
2.Stripping length: 7-8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

MX2EDGKM - 7.62 - XXP - XXXX - X - X - X

产品型号 间距 颜色 板数 01:常规颜色 0.1:Y-一字螺丝 A-Z:其他定制 0.2-99: 1-S:十字螺丝 1:透明色:TT 2-P:平头十字螺丝 白色:WE 灰色:GY 蓝色:BU 黑色:BK 绿色:GN 黄色:YW

Pitch Range In mm	Nominal Dimension Range In mm	—	□
-------------------	-------------------------------	---	---

Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	0.1/10	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.06.20	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	MX2EDGKM-7.62-XXP		



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司

DWGNO.