
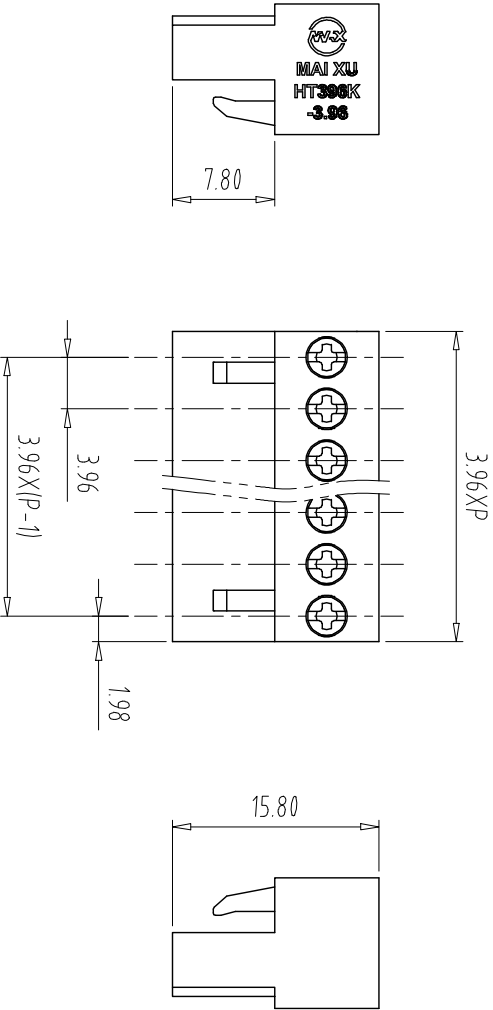


注：本型为禁止传输、复制、编辑、修改、以及利用其内容进行交流

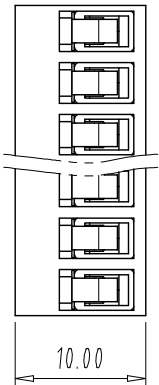

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	8A	/	10A
Rated Voltage	300V	/	300V

2. Torque value: M2, 1.77Lb/in

3. Wire range: 26-16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	10A	10A	10A

2. Torque value: M2, 0.2Nm
3. wire range: 0.2-1.5mm²


NOTES2:

- Housing: PA66(UL94V-0)
- Solder Pin: Copper alloy(Sn Plated)
- Spring: Stainless Steel
- Screw: Steel(M2,Zn Plated)

NOTES3:

- Pitch: 3.96mm Poles: 02-24P
- Stripping length: 5-6mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

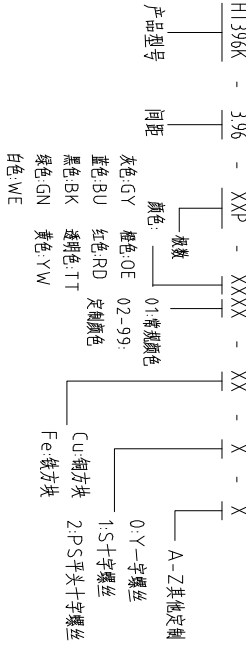

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
±0.30	±0.70	±1.00	±1.30	±2°	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.09.05	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	HT396K-3.96-XXP		
CIXI MAIXU ELECTRONICS CO.,LTD.					
慈溪市迈旭电子有限公司					
DWGNO.					